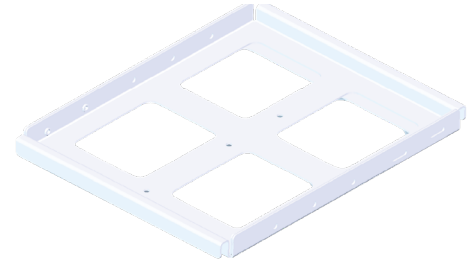# CMA-100-100

Ceiling Mount Accessory

MODEL NUMBERS: CMA-100-100

Nextivity's ceiling mount accessory is the perfect solution to securely mount a QUATRA coverage unit (CU) on an indoor ceiling grid in plenum space whenever needed. This mounting bracket is designed for ease of use and is adjustable for standard ceiling tile sizes. It provides concealed ceiling mounting solutions for CUs in various indoor environments, including offices, schools, hotels, and retail spaces. The versatile accessory optimally supports both installing a single omnidirectional antenna for Active DAS in wide open areas and a multi-antenna Active DAS hybrid to provide coverage in multiple smaller wall-isolated areas using a single CU.

CMA-100-100

Features and benefits include:

- Standardize on a single bracket to be available whenever needed at a site with wide compatibility with CEL-FI QUATRA 4000(i/c/e) and QUATRA EVO class of coverage units
- Improved coverage unit installation concealment to allow strategic install location selection of CU as feasible and optimal for the site coverage.Compact form factor for aesthetically pleasing deployments
- Easy installation with bracket adjusted for ceiling grid tile size of the site
- Availability of mechanical features to flexibly allow positive reinforcement as local building regulations require.
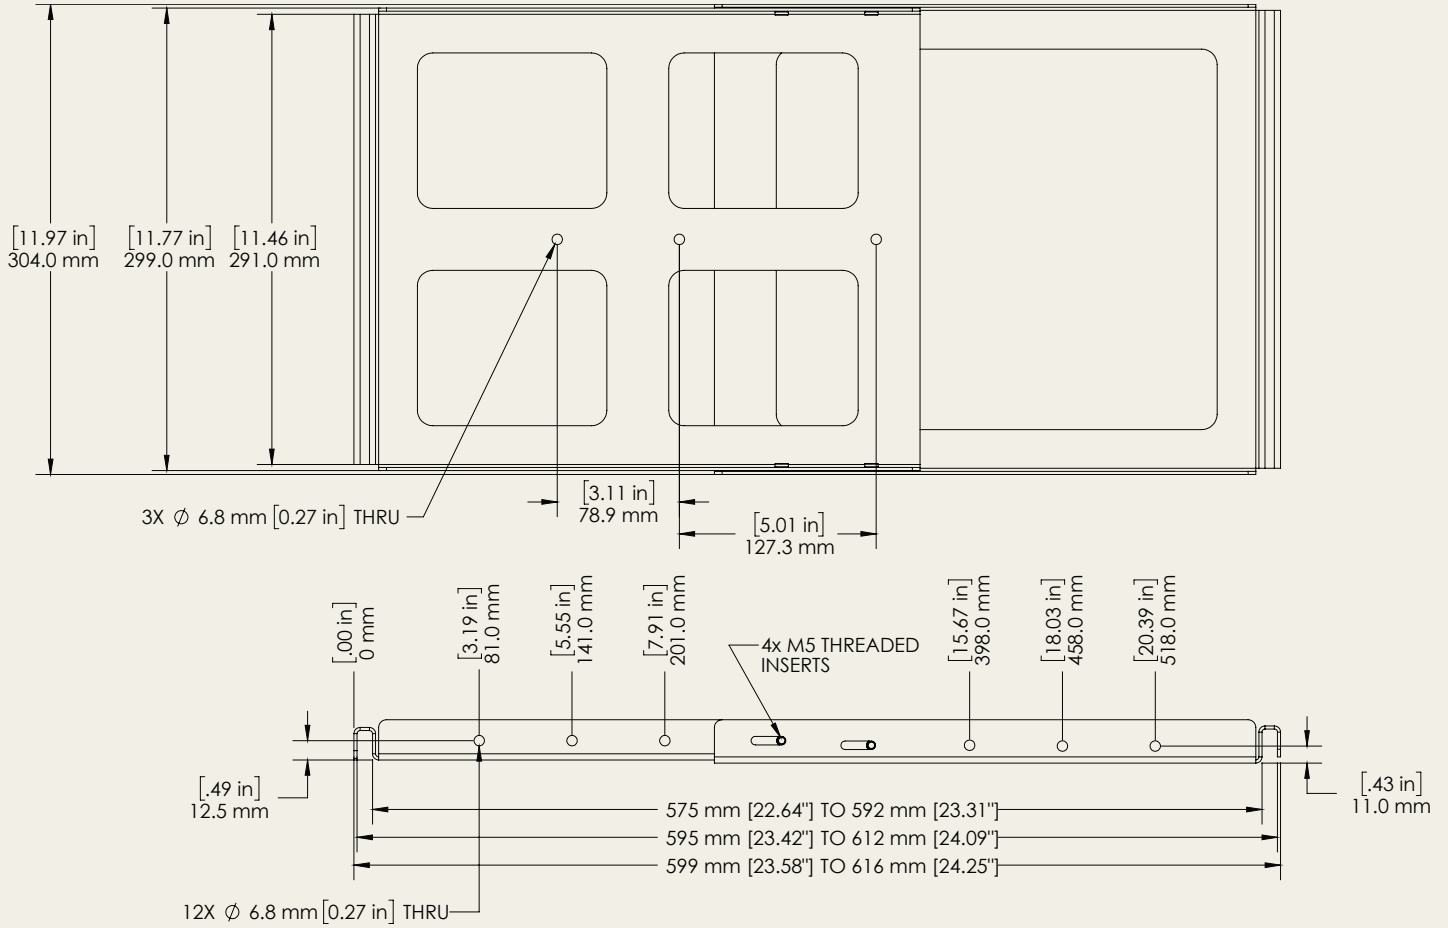
Specifications

Material	Powder Coated Aluminum
Color	White
Adjustability for Grid Size (in (mm))	22.64(575) to 23.31(592)
Compatibility	CEL-FI QUATRA 4000 class of CUs: • Q41-RECU • Q41-EECU • Q41-5ECU • I41-5ECU CEL-FI QUATRA EVO class of CUs • Q41-BXCU • Q41-EXCU-2
Box Contents	1x Ceiling Mount Bracket 4x M5 Screws 4x Washers 2x Coverage Unit Mount screws
Product Dimensions (in (mm))	24.25 x 11.97 x 1.10 (616 x 304 x 28)
Product Weight (lbs. (kg))	1.73 (0.79)
Shipping Dimensions (in (mm))	17.25 x 13.75 x 1.88 (438 x 349 x 48)
Shipping Weight (lbs. (kg))	2.56 (1.16)

CMA-100-100

[11.97 in] 304.0 mm
[11.77 in] 299.0 mm
[11.46 in] 291.0 mm

3X ⌀ 6.8 mm [0.27 in] THRU

[3.11 in] 78.9 mm

[5.01 in] 127.3 mm

[.00 in] 0 mm
[3.19 in] 81.0 mm
[5.55 in] 141.0 mm
[7.91 in] 201.0 mm
[15.67 in] 398.0 mm
[18.03 in] 458.0 mm
[20.39 in] 518.0 mm

4x M5 THREADED INSERTS

[.49 in] 12.5 mm

[.43 in] 11.0 mm

575 mm [22.64"] TO 592 mm [23.31"]
595 mm [23.42"] TO 612 mm [24.09"]
599 mm [23.58"] TO 616 mm [24.25"]

12X ⌀ 6.8 mm [0.27 in] THRU

Product specifications are subject to change without prior notification.

NEXTIVITY
Smarter by Design

16550 West Bernardo Drive, Bldg. 5, Suite 550 | San Diego, CA 92127 | www.nextivityinc.com